

## SINGLE-STAGE VACUUM GENERATORS PVP 2 and PVP 3




With their extremely reduced size and high performance, these single-stage vacuum generators operate exploiting the Venturi principle.

Supplying the generator with compressed air in P, vacuum will be generated at connection U, while both the supply and the sucked air will be released through R.

By interrupting the air supply in P, the vacuum effect in U will also stop.

The vacuum generators described in this page are generally used for interconnecting vacuum cups, for gripping and handling non-porous objects and equipment with low capacity requirements.

They are made with anodised aluminium with brass ejectors.

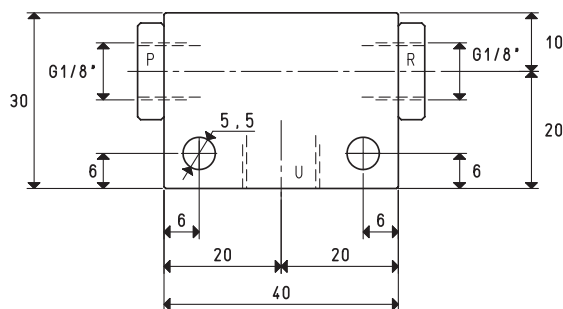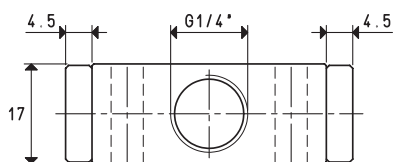

P=COMPRESSED AIR CONNECTION




R=EXHAUST

U=VACUUM CONNECTION

Art.		PVP 2		
Quantity of sucked air	cum/h	2.8	2.9	3.0
Max. vacuum level	-kPa	60	70	85
Final pressure	mbar abs.	400	300	150
Supply pressure	bar (g)	4	5	6
Air consumption	NI/s	0.7	0.9	1.0
Working temperature	°C			-20 / +80
Noise level	dB(A)			78
Weight	g			70

**Note:** All the vacuum data indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and are obtained with a constant supply pressure.

# SINGLE-STAGE VACUUM GENERATORS PVP 3

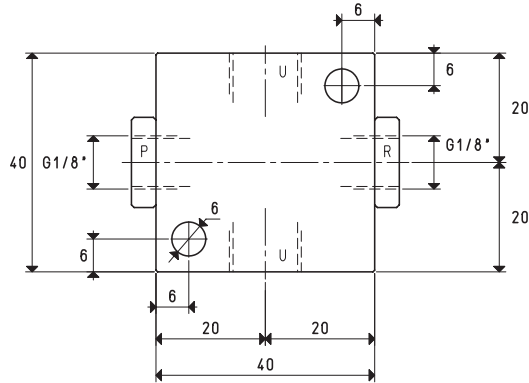

P=COMPRESSED AIR CONNECTION

R=EXHAUST

U=VACUUM CONNECTION

Art.	PVP 3			
Quantity of sucked air	cum/h	3.4	3.5	3.7
Max. vacuum level	-kPa	60	70	85
Final pressure	mbar abs.	400	300	150
Supply pressure	bar (g)	4	5	6
Air consumption	NI/s	1.1	1.3	1.5
Working temperature	°C	-20 / +80		
Noise level	dB(A)	80		
Weight	g	100		

**Note:** All the vacuum data indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and are obtained with a constant supply pressure.