


LV 2290

## Spring Check Valve

Screwed BSPP  
 Fixed Stainless Steel Filter  
 NBR Rubber Seat  
 Cracking Pressure 1 psi

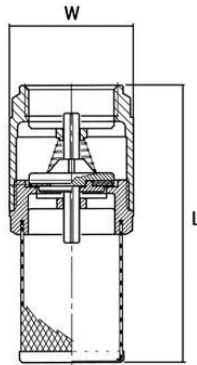

### Pressure/Temperature Ratings

Max Pressure	1/2" to 1"	10 Bar
	1 1/4" to 2"	8 Bar
	2 1/2" to 4"	6 Bar
Max Temperature	-10°C to 110°C	

### Material List

Body	Brass
Cap	Brass
Flap	Brass
Gasket	NBR
Spring	Steel
Strainer	Stainless Steel

### Dimensions

DN	Size	L	H	Kg
15	1/2"	80	30	0.11
20	3/4"	90	37	0.12
25	1"	100	44	0.18
32	1 1/4"	110	56	0.27
40	1 1/2"	126	63	0.33
50	2"	146	78	0.56
65	2 1/2"	162	103	1.05
80	3"	188	121	1.60
100	4"	214	155	2.58