


LV 7160

Ball Valve - British Gas Approved EN331:1995



Nickel Plated Body, Screwed BSPP Female, Full Bore, Yellow PVC Coated Steel Lever

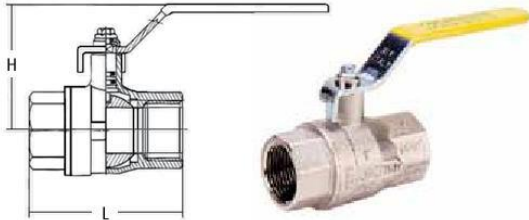

Pressure/Temperature Ratings

Max Pressure	1/4" - 1/2" PN64
	3/4" - 2 1/2" PN40
	3" PN32
	4" PN25
Temperature Gas	-20°C to 70°C
Temperature Fluid	-20°C to 150°C

Material List

Body	Brass Nickel Plated
Ball	Brass
Seats	PTFE
Stem	Brass
Stem Seal	Viton/NBR
Handle	PVC Coated Steel

Dimensions

DN	Size	L	H	Kg
8	1/4"	48	48	0.13
10	3/8"	48	48	0.15
15	1/2"	59	55	0.25
20	3/4"	69	66	0.4
25	1"	83	70	0.6
32	1 1/4"	94	83	0.95
40	1 1/2"	102	93	1.24
50	2"	124	102	1.88
65	2 1/2"	148	143	3.35
80	3"	171	153	5.4
100	4"	206	187	8.84