


Ball Valve - Locking Lever

Nickel Plated Body, Brass Ball & Stem, PTFE Seats, Full Bore, Yellow Lever, Screwed BSPT

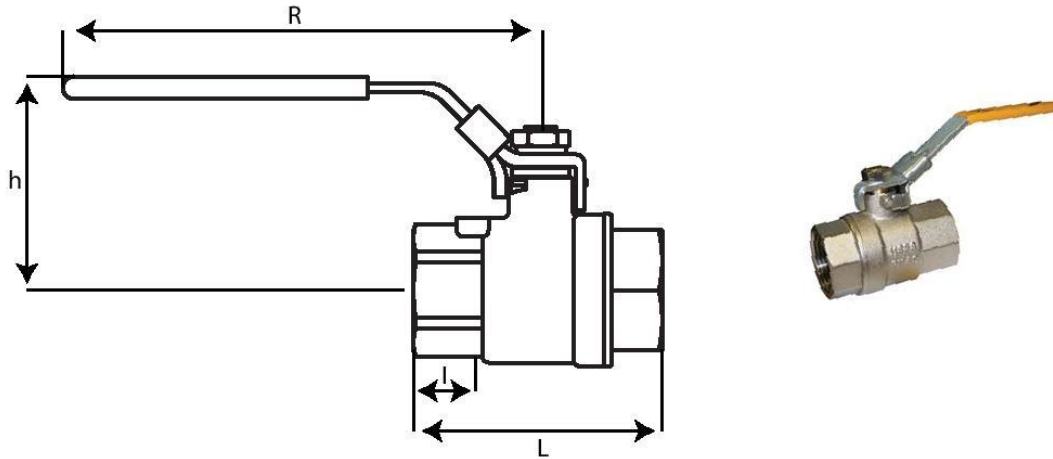

Pressure/Temperature Ratings		
Pressure	¼" & ⅜"	PN25
	½" to 2"	PN40
	2½" to 4"	PN16
Temperature	-20° C to 110° C	

Dimensions							
DN	Size	I	L	H	R	Kg	
10	¼"	14	48.5	45	97	0.1	
12	⅜"	16.5	56	48	96	0.1	
15	½"	16	58.5	51	95	0.2	
20	¾"	16	62	54	95	0.2	
25	1"	18	71	66	111	0.4	
32	1¼"	19	83.5	69	133	0.6	
40	1½"	24	101	78	130	1.0	
50	2"	20	104.5	99	200	1.5	
65	2½"	33	152.5	125	245	3.8	
80	3"	36	170	135	245	5.0	
100	4"	41	205	145	245	8.3	

Material List	
Description	Material
Body	Brass
Bonnet	Brass
Ball	Brass
Stem	Brass
Seat	PTFE
Handle	Iron
Nut	Brass
O-Ring	NBR