


LV 4511L
LV 4510T

Brass Three-Way Ball Valve, T-Port / L-Port

Reduced Bore
Female/Female
Screwed BSP
With ISO Top

- Threaded Ends: ISO 228/1
- Motor Plate Disc: ISO 5211
- Special Executions on Request:
O-Ring in: FP/EPDM/Silicone/HNBR

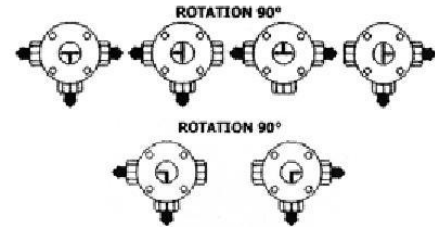

Pressure/Temperature Ratings

Max Pressure	40 Bar
Working Temperature	-10°C to 100°C

Material List

	Qty	
1 Body	EN12420-CW617N-Nickel	1
2 Ball	EN12164-CW614N-Chromium Plated	1
3 Seat	PTFE F391	4
4 Pushrod	EN12164-CW614N	1
5 O-Ring	NBR	4
6 Square	EN12164-CW614N	1
7 Sleeve	EN12420-CW617N-Nickel	3
8 O-Ring	NBR	2
9 Motor Plate Disc	EN12420-CW617N-Nickel	1
10 Anti-Scuff Ring	PTFE F391	1
11 Nut	EN12164-CW614N	1
12 Nut	EN12164-CW614N	1
13 Anti-Scuff Bush	PTFE F391	1

Dimensions

DN	S	S1	Ø	P	H	E	Q	ISO	*Nm	PN
1/2"	82	41	10	17	50.5	8	9	F03	4	40
3/4"	90	45	15	18.5	53.5	8	9	F03	4	40
1"	106	53	20	20	63	10	11	F05	5	40
1 1/4"	120	60	25	23.5	67	10	11	F05	6	40
1 1/2"	142	71	32	28.5	73	12	14	F05	8	40
2"	165	82.5	40	32	80	12	14	F05	9	40
2 1/2"	194	97	50	35	90.5	12	14	F05	12	40

* data effected without pressure
In according to Directive 97/23/CE TAB. 6

