


MAF302D / M series


AIR UNITS (Mist / Micromist Filter)



Symbol



D : 0.3 μm



M : 0.01 μm

● MA302D is designed for removal of foreign matter as well as oil mist (Element :0.3 μm)

● MA302M is designed for removal of foreign matter as well as oil mist (Element : 0.01 μm)

Specification

Model	MAF302D/M		
Bore No.	8A	10A	15A
Port size	1/4	3/8	1/2
Medium	Air		
Operating pressure range (※)	0.05~1 MPa		
Proof pressure	1.5 MPa		
Ambient temperature	-5°C~+60°C (No freezing)		
Filter element	0.3 μm , 0.01 μm		
Weight	365 g		

※ 1. Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.

※ 2. Choose auto-drain FMRF300, the pressure range is 0.15 ~ 1 MPa.

Order example

MAF302D - 8A - □ - B - □

MODEL

FILTER ELEMENT
D: 0.3 μm
M: 0.01 μm

BORE SIZE
8A : 1/4
10A : 3/8
15A : 1/2




D: Auto drain valve (FMRF300)
N: Nylon bowl

PORT THREAD
Blank: Rc thread
G: G thread
NPT: NPT thread

B: C type bracket

Option accessories

C type bracket

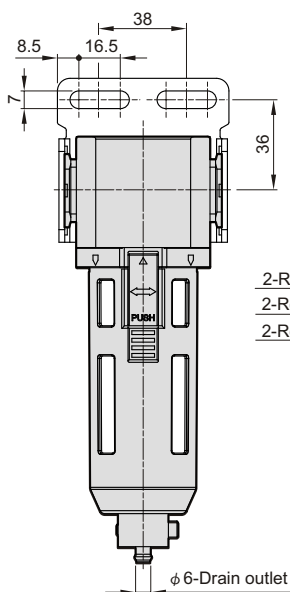

2-Rc1/4
2-Rc3/8
2-Rc1/2

